

07/2023



⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

details needed for main valve

- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- type of actuation

details needed for pneumatic actuation

- nominal voltage
- type of protection
- actuation pressure range min/max
- pilot valve type

details needed for hydraulic actuation

- actuation pressure range min/max
- hydraulic control valve function

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application. To avoid hydraulic shocks in pipelines, the flow velocities must be taken into account when designing valves for liquids.

■ specifications not highlighted are standard
 ■ specifications highlighted in grey are optional

2/2-way valve

- pressure range**
- orifice¹⁾**
- connection**
- function**

operating principle
body material

- valve seat**
- seal materials**

- ports**
- function**
- pressure range**

- Kv value²⁾**
- vacuum**
- pressure-vacuum**

- back pressure**
- media**

- abrasive media**
- damping**

- flow direction**
- switching cycles³⁾**
- switching time⁴⁾**

- media temperature**
- ambient temperature**
- flush ports**
- leak ports**
- limit switches**
- manual override**
- approvals**
- mounting**
- weight⁵⁾**
- additional equipment**

- nominal voltage**

- power consumption**

- protection**
- energized duty rating**
- connection**
- optional**
- additional equipment**
- max. temperature**

- explosion proof**


- actuation pressure range**
- air consumption⁶⁾**
- cycle speed**
- control**
- pilot valve interface**
- actuator ports**

- actuation pressure range**
- control**
- actuator ports**
- by media**


externally controlled

- PN 0-40 bar
- DN 25 / 32 / 40 / 50 / 65 / 80 / 100 / 125 / 150 mm
- flange

- valve normally closed
- symbol **NC**



- valve normally open
- symbol **NO**



pressure balanced, with spring return

- ① aluminium
- ② steel galvanized (upon request)
- ③
- ④
- ⑤
- ⑥ stainless steel (upon request)

synthetic materials on metal

- NBR, PU
- PTFE, FPM, PE

general specifications

- FCF flanges PN 16 / 40
- NC NO
- bar 0-16 / 0-40

- see table
- leak rate < 10⁻⁴ mbar•L•s⁻¹
- P₁ ⇔ P₂ pressure side max. 40 bar
- P₂ > P₁ vacuum side leak rate upon request
- emulsion - oil - neutral gases available (max. 16 bar)
- other medias upon request

- opening by throttles on pilot valve
- closing as marked
- A ⇔ B as marked
- see table
- see table

- °C direct mounted pilot valve 60
- °C direct mounted pilot valve 50
- > 60 °C upon request
- > 50 °C upon request

- via pilot valve
- see table
- inductive
- upon request

electrical specifications

- U_n DC 24 V
- U_n AC 230 V 50 Hz
- DC 4,8 W
- AC pick up 11.0 VA holding 8.5 VA
- IP65 (P54) acc. DIN 40050
- ED 100%
- plug acc. DIN EN 175301-803 form B, 2 positions x180° / wire diameter 6-8 mm
- M12x1 connector acc. DESINA
- illuminated plug with varistor
- media 60°C
- ambient 50°C
- E Ex e II T5 nominal voltage U_n DC 24 V 3,25 W
- power consumption AC 230 V 50 Hz 2,90 W

pneumatic specifications

- bar 4-8
- see table
- main valve speed variable by throttles on pilot valve
- preferably 5/2 way pilot valve
- NAMUR acc. VDI / VDE 3845
- 2/4 G 1/4
- NPT 1/4


hydraulic specifications

- bar 30-60
- preferably 4/2 way control valve
- X/Y G 1/4
- NPT 1/4

coax® data sheet - coaxial valve


type FCF 25 - FCF 150

function: **NC**
closed when not energized

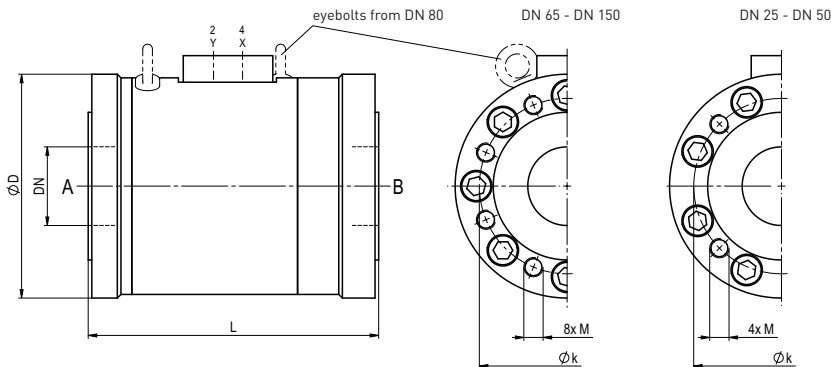

type		FCF 25	FCF 32 40	FCF 50	FCF 65	FCF 80	FCF 100	FCF 125	FCF 150
¹⁾ orifice		DN 25 mm	DN 40 mm	DN 50 mm	DN 65 mm	DN 80 mm	DN 100 mm	DN 125 mm	DN 150 mm
²⁾ Kv value	m ³ /h	27	45	80	125	170	290	400	550
³⁾ switching cycles	1/min	50	50	50	50	50	40	30	20
⁴⁾ switching time	ms opening	50-3000	100-3000	150-3000	250-3000	350-3000	450-3000	700-3000	600-3000
	ms closing	50-3000	100-3000	150-3000	400-3000	350-3000	300-3000	450-3000	600-3000
⁵⁾ weight	kg	4	6,5	8	13	15	26	38	58
⁶⁾ air consumption	cm ³ /Hub	18	26	47	77	120	285	515	640
constructive length	L	170	190	200	240	260	350	400	450
flanges PN 16	ØD	115	150	165	185	200	230	260	295
DIN EN 1092-1	Øk	85	100 110	125	145	160	180	210	240
	M	M12	M16	M16	M16	M16	M16	M16	M20
flanges PN 40	ØD	115	150	165	185	200	235	270	300
DIN EN 1092-1	Øk	85	100 110	125	145	160	190	220	250
	M	M12	M16	M16	M16	M16	M20	M24	M24

function: **NO**
open when not energized

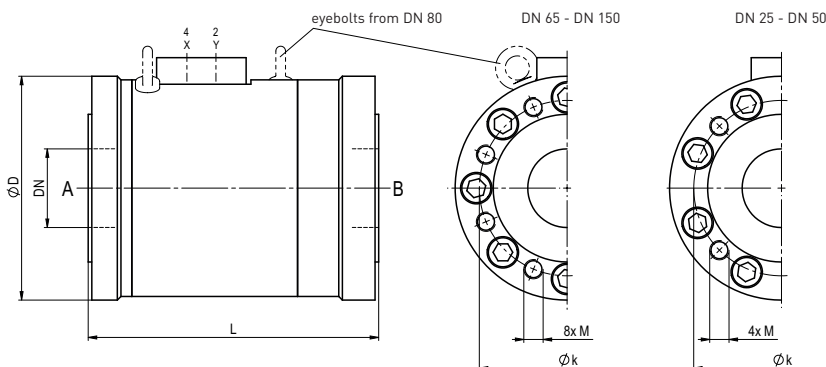

pneumatic specifications

