

# RF1034 Datasheet

PRESSURE REGULATOR FOR HYDROGEN  
REFUELLING APPLICATIONS

● Gas ● Liquid | ● Diaphragm ● Piston | ● Self-Venting ● Non-Venting | Max Inlet: 1,034 bar (15,000 psi) | Max Outlet: 1,034 bar (15,000 psi) | Cv 0.3



*Locking-cap option  
also available.*

## INTRODUCING THE RF1034...

The RF1034 is a piston-sensed pressure regulator, designed specifically for high pressure hydrogen refuelling applications.

With a **balanced main valve design** as standard, the RF1034 offers accurate control of the high pressures typically associated with hydrogen refuelling points.

In addition, the RF1034 offers convenient access to the seat cartridge in the base of the regulator for simplified servicing.

## SPECIFICATION

Max. Rated Inlet Pressure	1,034 bar (15,000 psi)
Outlet Ranges	Up to 1,034 bar (15,000 psi)
Design Proof Pressure	150% max. working pressure
Seat Leakage	In accordance with ANSI/FCI 70-3

\* Pressure regulator rating may be limited by connection type, Cv and/or seat material

## STANDARD MATERIALS OF CONSTRUCTION

PART	MATERIALS
Body and Bonnet	AISI 316/316L Stainless Steel (UNS S31600/S31603)
Main Valve Pin	AISI 316/316L Stainless Steel (UNS S31600/S31603)
Seat	Tecasint®
Valve Spring	Inconel® X750
Piston	AISI 316/316L Stainless Steel (UNS S31600/S31603)
O-Rings	EPDM
Filter	40 Microns

## FEATURES AND BENEFITS

### 1 EASY ACCESS TO SEAT CARTRIDGE

Simplified servicing through the base of the regulator.

### 2 PISTON SENSING ELEMENT

Perfect for use in challenging conditions.

### 3 OPTIONAL AUTOMATED CONTROL

Optional automated control of the regulator.

### 4 CV 0.3

Fast refuelling times for extra convenience.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



DESIGNED AND BUILT IN THE UK

## PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH  
T +44 (0)1457 899 307  
E sales@pressure-tech.com  
W www.pressure-tech.com

220819

PAGE:  
1 OF 4


# RF1034 Datasheet

PRESSURE REGULATOR FOR HYDROGEN  
REFUELLING APPLICATIONS

● Gas ● Liquid | ● Diaphragm ● Piston | ● Self-Venting ● Non-Venting | Max Inlet: 1,034 bar (15,000 psi) | Max Outlet: 1,034 bar (15,000 psi) | Cv 0.3

## DRAWING AND INSTALLATION DIMENSIONS

Please contact the office for further information.

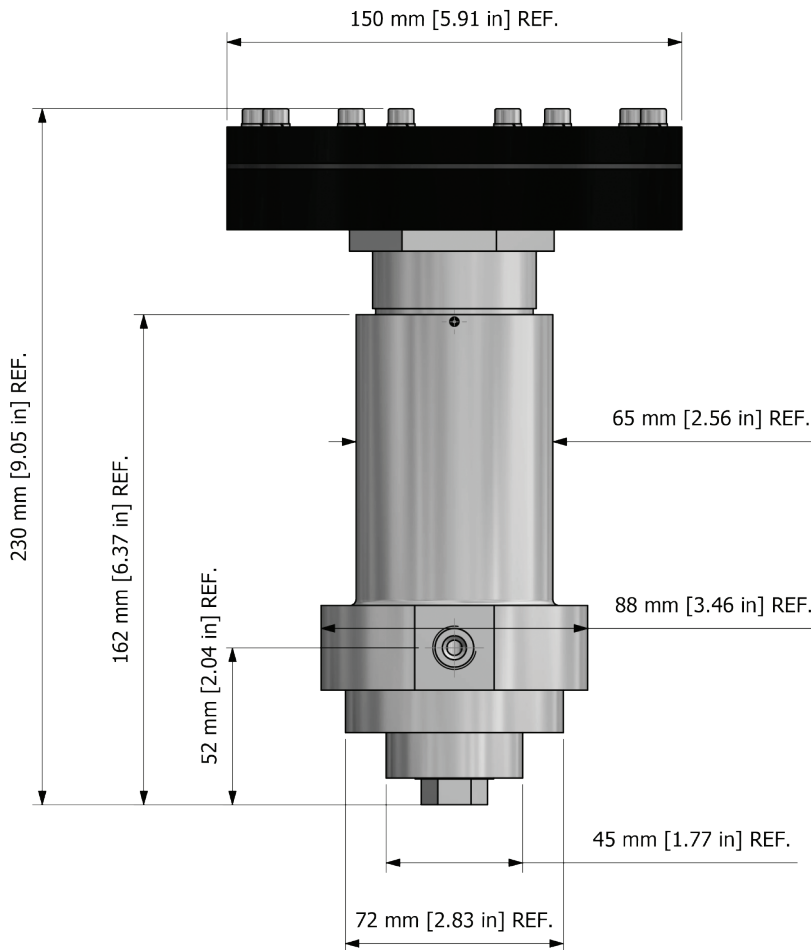

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



DESIGNED AND BUILT IN THE UK



### PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E sales@pressure-tech.com

W www.pressure-tech.com

220819

PAGE:  
2 OF 4

# RF1034 Datasheet


PRESSURE REGULATOR FOR HYDROGEN  
REFUELLING APPLICATIONS

Gas  Liquid |  Diaphragm  Piston |  Self-Venting  Non-Venting | Max Inlet: 1,034 bar (15,000 psi) | Max Outlet: 1,034 bar (15,000 psi) | Cv 0.3

## FLOW CURVE

Please contact the office for further information.

## PORTING CONFIGURATIONS

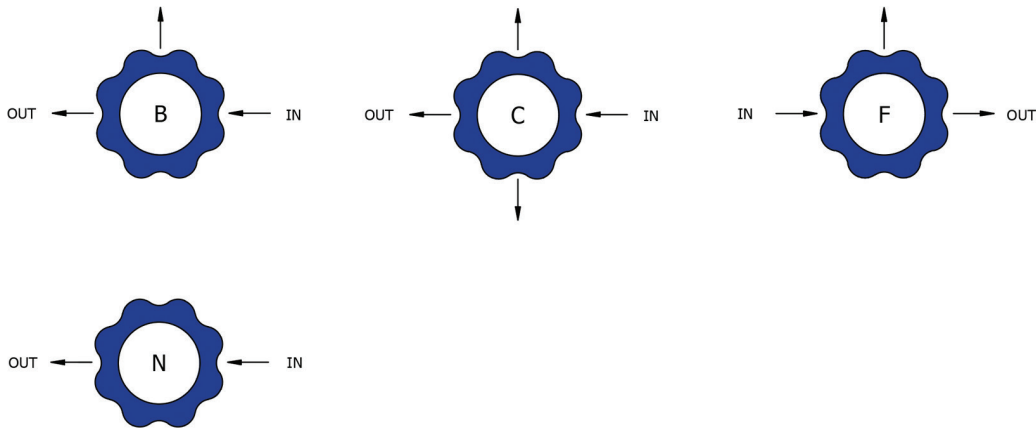

### Note:

Additional porting configurations are available - please contact the office for further information.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues.  
Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



DESIGNED AND BUILT IN THE UK

### PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH  
T +44 (0)1457 899 307  
E sales@pressure-tech.com  
W www.pressure-tech.com

220819

PAGE:  
3 OF 4


# RF1034 Datasheet

PRESSURE REGULATOR FOR HYDROGEN  
REFUELLING APPLICATIONS

Gas  
  Liquid  
  Diaphragm  
  Piston  
  Self-Venting  
  Non-Venting  
 Max Inlet: 1,034 bar (15,000 psi)  
 Max Outlet: 1,034 bar (15,000 psi)  
 Cv 0.3

## ORDERING INFORMATION

To build a Pressure Tech part number, simply combine the characters identified below in sequence:

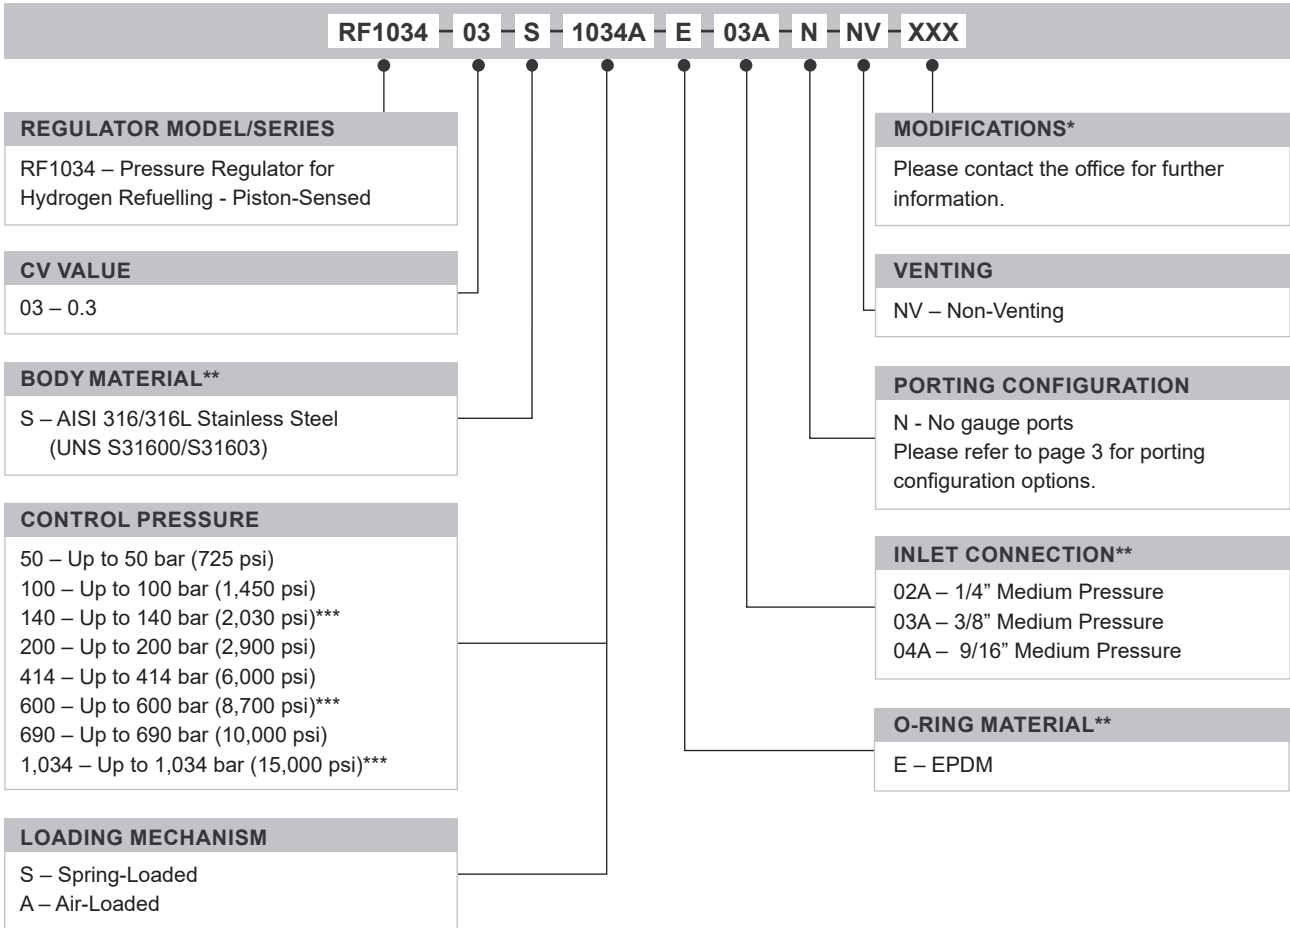

OPTIONAL EXTRAS		
	PART NUMBER	DESCRIPTION
Service Kit	SRK-RF1034-03-S-1034A-E...	EPDM o-ring.

*Note:*  
Ancillary equipment also available

**TRADEMARKS:** Inconel® is a registered trademark of Inco Alloys International  
Tecasint® is a registered trademark of Ensinger GmbH

\* Where applicable  
\*\* Other connections/materials may be available - please contact the office  
\*\*\* Air-loaded only

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues.  
Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



DESIGNED AND BUILT IN THE UK

**PRESSURE TECH LTD**  
Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH  
T +44 (0)1457 899 307  
E sales@pressure-tech.com  
W www.pressure-tech.com

220819

PAGE:  
4 OF 4