


Indoor HydroCab

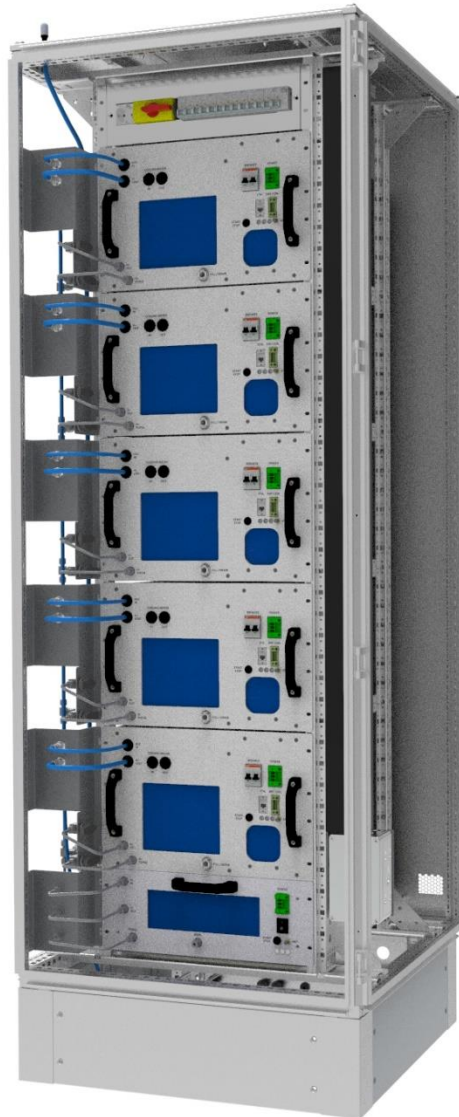

The high – quality 19" cabinet system from our **Indoor HydroCab** is particularly suitable for your individual indoor H2 application and includes up to five stackable el 2.1 electrolyzers and one dryer.

Several cabinets can be used to build larger systems.

Contact us: info@h2coresystems.com; +49 151 11 34 78 99



This is a design data sheet, changes to the technical parameters are protected.

Specifications

Indoor HydroCab



WxDxH= 800 x 800 x 2200 [mm]

IP rating	IP20 indoor cabinet
Cabinet outside dimensions	W × D × H in mm = 800 × 800 × 2200
Available size inside	42 U
Cabinet weight (empty)	180 kg
Surrounding free space requirements	Front: 1.5 m - for working access and airflow Back: 0.5 m - for airflow Side, top and bottom: no minimum distance required.
Cooling	Passive. Airflow for stack cooling is blown for each module individually from front to back.
Location of connections and piping	All piping and electrical connections are located in the front of the machine. Power, water and hydrogen connections are located at the bottom of the back of the cabinet.
Filters	No filters needed
Ambient temperature	5 - 45°C
Ambient humidity	20 – 95%, non-condensing

Contact us: info@h2coresystems.com; +49 151 11 34 78 99



This is a design data sheet, changes to the technical parameters are protected.