

Data Sheet

E2X-E2F Explosion-Proof Pressure Transducer For Hydrogen Applications

FEATURES

- E2X - Flameproof, intrinsically safe and non-incendive approval for explosion-proof/hazardous applications
- E2F - Flameproof approval for explosion-proof/hazardous applications
- FM, ATEX and IECEx approvals
- IP66/67 Ingress rating
- Thick sensing diaphragm using proven CVD technology:
 - 316L SS ranges to 5000 psi/350 bar
 - A286 ranges to 20,000 psi/1400 bar
- External magnetic offset & span adjustment
- Barometric pressure ranges available (standard & custom ranges)

TYPICAL USES

- Hydrogen filling stations
- Hydrogen compressors
- Hydrogen storage tanks
- Reactor vessels
- Fuel cells for vehicles

PERFORMANCE SPECIFICATIONS

Reference Temperature: 70 °F ±3.6 °F, (21 °C ±2 °C)

Static Accuracy: ±0.25% of span, ±0.50% of span, ±1.0% of span,
Terminal Point Method includes:
hysteresis, linearity, repeatability, offset and span

Stability: ±0.25% year at reference conditions

ENVIRONMENTAL SPECIFICATIONS

Thermal Coefficients: Offset: ±0.005% /°F from -40 °F to 257 °F
(±0.009% /°C from -40 °C to 125 °C)
Span: ±0.005% /°F from -40 °F to 257 °F
(±0.009% /°C from -40 °C to 125 °C)

Temperature Limits: Storage: -58 °F to 257 °F (-50 °C to 125 °C)
Operating: -40 °F to 176 °F (-40 °C to 80 °C)
Media: -40 °F to 176 °F (-40 °C to 80 °C)

Humidity: 0-100% (non-condensing)

FUNCTIONAL SPECIFICATIONS

Response Time (Output) 4 ms

Gauge/Compound Pressure Ranges: Vac to 20,000 psig/Vac to 1400 bar

Shock: 80 g, 6 ms, Haversine

Vibration: Random: 10 g RMS 20-2000 Hz

Proof Pressure: 1.2X - 1.5X

Burst Pressure: 5X - 8X



E2X
Pressure Transducer



KEY BENEFITS

- Highly configurable
- Easy calibration of offset and span

ELECTRICAL SPECIFICATIONS

Circuit Protection: Reverse polarity protected

EXPLOSION PROOF INSTALLATIONS (E2X and E2F)

9-36 Vdc: 4-20 mA, 20-4 Ma (2-wire), 0-5 Vdc, 1-5 Vdc, 1-6 Vdc, 0.1-5 Vdc, 0.5-4.5 Vdc
14-36 Vdc: 0-10 Vdc, 1-11 Vdc, 0.1-10 Vdc

INTRINSICALLY SAFE INSTALLATIONS (E2X Only)

Supply Voltage: Output

9-28 Vdc: 0-5 Vdc, 1-5 Vdc, 1-6 Vdc, 0.1-5 Vdc, 0.5-4.5 Vdc
14-28 Vdc: 0-10 Vdc, 1-11 Vdc, 0.1-10 Vdc
9-30 Vdc: 4-20 mA, 20-4 mA (2-wire)

NON-INCENDIVE INSTALLATIONS (E2X Only)

Supply Voltage: Output

9-28 Vdc: 0-5 Vdc, 1-5 Vdc, 1-6 Vdc, 0.1-5 Vdc, 0.5-4.5 Vdc
14-28 Vdc: 0-10 Vdc, 1-11 Vdc, 0.1-10 Vdc
9-30 Vdc: 4-20 mA, 20-4 mA (2-wire)

Adjustability: ±5% of span non-interactive offset & span

Supply Current: <8 mA (Vout)

Current Source/Sink for Voltage Output: 1 mA (source)/ 0.1 mA (sink) MAX.

Withstand/Breakdown: 100 Vdc/Vac, optional 500 Vdc/Vac

Data Sheet

E2X-E2F Explosion-Proof Pressure Transducer For Hydrogen Applications

PHYSICAL SPECIFICATIONS

Ingress Rating: IP66 (NEMA 4X) (STD.)
IP67 (IP69K Consult Factory)

WETTED MATERIAL

Diaphragm:	Sensor:	Material
	B	316L Stainless steel
	D	A286

Process Connection: 316L Stainless steel

NON-WETTED MATERIAL

Housing: 316L Stainless steel

EMC TESTING

EMC: Directive 2014/30/EU, and EN61326-1,
EN61326-2-3 (Industrial Env.)

Immunity:	61000-4-2 (ESD)	±4 kV/±8 kV (Contact/Air)
	61000-4-3 (Radiated RF)	10 V/m to 1 GHz, 3 V/m to 2 GHz, 1 V/m to 2.7 GHz
	61000-4-4 (EFT/Burst)	±1 kV (5/50 ns, 5 kHz)
	61000-4-5 (Surge)	±1 kV, Earth to Shield over all I/O lines
	61000-4-6 (Conducted RF)	3 V (0.15 to 80 MHz)
	61000-4-8 (Line Freq. Magnetic)	30 A/m

Emissions: EN 55011 (CISPR 11) Class A, Group 1 & FCC (47 CFR 15)

HAZARDOUS AREA CERTIFICATIONS

Explosion/Flame/Dust Ignition Proof Installations (E2X - E2F) - FM:

Class I, Division 1, Group A, B, C, D T4 -40 °C < Ta < 80 °C
Class II, Division 1, Group E, F, G T4 -40 °C < Ta < 80 °C
Class III T4 -40 °C < Ta < 80 °C

ATEX/IECEX:

Class I, Zone 1, AEx db IIC T4 Gb -40 °C < Ta < 80 °C
Class II, Zone 21, AEx tb IIIC T135 °C Db -40 °C < Ta < 80 °C

II 2 G Ex db IIC T4 Gb -40 °C < Ta < 80 °C
II 2 D Ex tb IIIC T135 °C Db -40 °C < Ta < 80 °C

Intrinsically Safe Installations (E2X only) - FM:

Class I, Division 1, Group A, B, C, D T4 -40 °C < Ta < 80 °C
Class II, Division 1, Group E, F, G T4 -40 °C < Ta < 80 °C
Class III, T4 -40 °C < Ta < 80 °C

ATEX/IECEX:

Class I, Zone 0, AEx ia IIC T4 Ga -40 °C < Ta < 80 °C
Class II, Zone 20, AEx ia IIIC T135 °C Da -40 °C < Ta < 40 °C
Class I, Zone 2, AEx ic IIC T4 Gc -40 °C < Ta < 80 °C
Class II, Zone 22 AEx ic IIIC T135 °C Dc -40 °C < Ta < 80 °C

II 1 G Ex ia IIC T4 Ga -40 °C < Ta < 80 °C
II 1 D Ex ia IIIC T135 °C Da -40 °C < Ta < 40 °C
II 3 G Ex ic IIC T4 Gc -40 °C < Ta < 80 °C
II 3 D Ex ic IIIC T135 °C Dc -40 °C < Ta < 80 °C

Non-Incendive (E2X only) - FM:

Class I, Division 2, Group A, B, C, D T4 -40 °C < Ta < 80 °C
Class II, Division 2, Group E, F, G T4 -40 °C < Ta < 80 °C
Class III, T4 -40 °C < Ta < 80 °C

TABLE 1: PROOF & BURST PRESSURE MULTIPLIERS

Sensor Range (psi)	B Sensor - 316L SS		D Sensor - A286	
	Proof	Burst	Proof	Burst
30				
45	1.5X	8X		
50	1.5X	8X		
60	1.5X	8X		
75	1.5X	8X		
100	1.5X	8X		
150	1.5X	8X		
200	1.5X	8X		
300	1.5X	8X		
500	1.2X	5X		
750	1.2X	5X		
1000	1.2X	5X		
1500	1.2X	5X		
2000	1.2X	5X		
3000	1.2X	5X		
5000	1.2X	5X	1.5X	5X
7500			1.5X	5X
10000			1.2X	5X
15000			1.2X	5X
20000			1.2X	5X
(Compound)				
V&30#				
V&45#	1.5X	8X		
V&60#	1.5X	8X		
V&100#	1.5X	8X		
V&150#	1.5X	8X		
V&200#	1.5X	8X		
V&300#	1.5X	8X		

Data Sheet

E2X-E2F Explosion-Proof Pressure Transducer For Hydrogen Applications

ORDERING CODE	Example:	E2X	B	3	C	F02	42	CF	X	10	F	100#	-XNH
Model													
E2X - Explosion proof		E2X											
E2F - Flame proof													
Sensor Materials - See Table 2 on page 4 for more options													
B - 316L Stainless steel			B										
D - A286													
Accuracy													
3 - 0.25% span				3									
5 - 0.50% span													
7 - 1.00% span													
Calibration Chart													
N - Without calibration chart													
C - With calibration chart					C								
Pressure Connections - See Table 3 on page 5 for more options													
F02 - (¼ NPT Female)						F02							
Output Type													
05 - 0-5 Vdc													
10 - 0-10 Vdc													
11 - 1-11 Vdc													
12 - 0.1-10 Vdc													
13 - 0.1-5 Vdc													
15 - 1-5 Vdc													
16 - 1-6 Vdc													
24 - 20-4 mA													
42 - 4-20 mA							42						
45 - 0.5-4.5 Vdc non-ratiometric													
00 - Custom													
Electrical Connections - See Table 4 on page 6 for more options													
CF - (½ NPT conduit w/flying leads)								CF					
Mating Connector													
X - Without mating connector									X				
Cable Length													
Max cable length of 30 ft for outputs 05, 10, 11, 12, 13, 15, 16 and 45. Max cable length of 99 ft for outputs 24 and 42.													
00 - No cable													
XX - 01 to 99										10			
Unit of Length													
F - Feet											F		
M - Meter													
N - Inches													
0 - No cable													
Pressure Ranges - Coding example only													
100# - 100 psig												100#	
Options (if choosing an option(s) must include an "X")													
NN - Paper tag													-X
NH - Stainless steel tag													NH

Accessory	Part Number
Offset and Span Adjustment Magnet	266A143-01

Data Sheet

E2X-E2F Explosion-Proof Pressure Transducer For Hydrogen Applications

TABLE 2 - SENSOR PRESSURE RANGE

psi	Sensor Material		bar	Sensor Material		inHg	Sensor Material	
	B 316L SS	D A286		B 316L SS	D A286		B 316L SS	D A286
30#	•		1.6BR	•		50IM	•	
45#	•		2BR	•		100IM	•	
50#	•		2.5BR	•		200IM	•	
60#	•		4BR	•		300IM	•	
75#	•		6BR	•		500IM	•	
100#	•		10BR	•		1000IM	•	
150#	•		16BR	•		V&30IM		
200#	•		20BR	•		V&60IM	•	
250#	•		25BR	•		V&100IM	•	
300#	•		40BR	•		V&200IM	•	
500#	•		60BR	•				
750#	•		100BR	•				
1000#	•		160BR	•				
1500#	•		200BR	•				
2000#	•		250BR		•			
2500#	•		400BR		•			
3000#	•		600BR		•			
5000#	•	•	1000BR		•			
7500#		•	1400BR		•			
10000#		•	V&1.6BR	•				
15000#		•	V&2BR	•				
20000#		•	V&4BR	•				
V&30#	•		V&6BR	•				
V&45#	•							
V&60#	•							
V&100#	•							
V&150#	•							
V&200#	•							
V&300#	•							



What Does It Mean?

Ashcroft's TruAccuracy™ specification is exclusively based on terminal point methodology instead of statistically derived schemes like 'best fit straight line'.

TruAccuracy™ means the Ashcroft E2X-E2F has ±0.25% accuracy out of the box. Zero and span setting errors are already included in the ±0.25% accuracy spec.
















The E2X-E2F is ready to be installed with no additional calibration adjustments required.

A unit from another manufacturer advertised as ±0.25% best fit straight line may actually be a ±1.25% to ±2.25% device. Using best fit straight line method, the accuracy spec does not include zero and span setting errors, which can be as much as ±1.00% each.

Data Sheet

**E2X-E2F Explosion-Proof Pressure Transducer
For Hydrogen Applications**

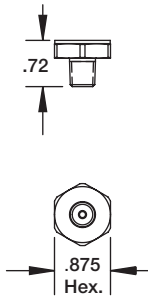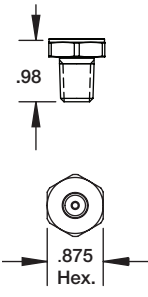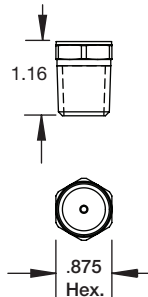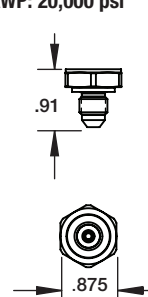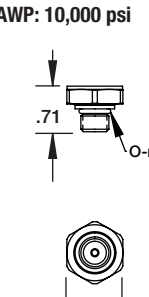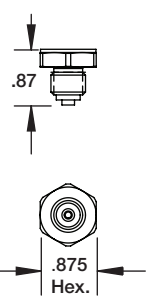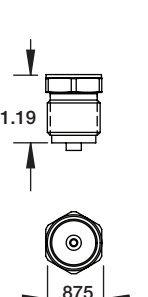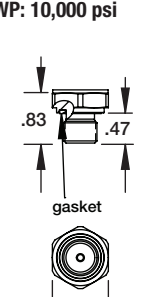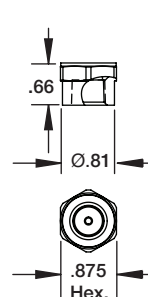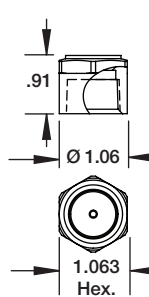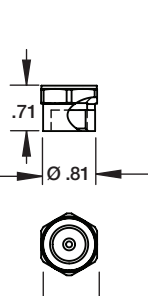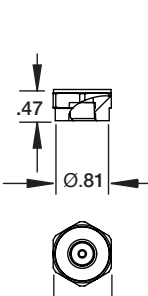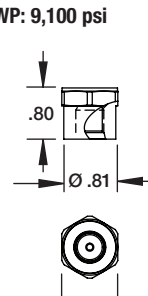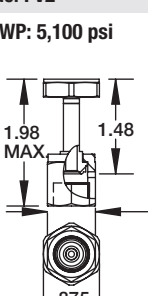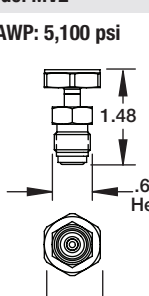TABLE 3 - PRESSURE CONNECTION DIMENSIONS

<p>1/8 NPT Male Code: M01</p>	<p>1/4 NPT Male Code: M02</p>	<p>1/2 NPT Male Code: M04</p>	<p>7/16-20 UNJF-3A 37° Flare (SAE AS4395) Code: M76</p>	<p>7/16-20 UNJF-2A SAE-Male (SAE J1926 O-Ring Boss seal) Code: MEK</p>
<p>MAWP: 20,000 psi</p>	<p>MAWP: 20,000 psi</p>	<p>MAWP: 10,000 psi</p>	<p>MAWP: 20,000 psi</p>	<p>MAWP: 10,000 psi</p>
				
<p>G1/4 B-Male (EN837-1) Code: MG2</p>	<p>G1/2 B Male (EN837-1) Code: MG4</p>	<p>G1/4 A-MALE (stud end DIN 3852-E G1/4) Code: MGA</p>	<p>1/4-18 NPT Female Code: F02</p>	<p>1/2-14 NPT Female Code: F04</p>
<p>MAWP: 20,000 psi</p>	<p>MAWP: 20,000 psi</p>	<p>MAWP: 10,000 psi</p>	<p>MAWP: 10,000 psi</p>	<p>MAWP: 5,000 psi</p>
				
<p>9/16-18 UNF-2B Female Code: F09</p>	<p>1/8 -27 NPT Female Code: F01</p>	<p>7/16-20 UNF-2B SAEJ1926 Code: FRW</p>	<p>9/16-18 Female Swivel Nut (compatible with 1/4 VCR® fitting) Code: FV2</p>	<p>9/16-18 Male Swivel Nut (compatible with 1/4 VCR® fitting) Code: MV2</p>
<p>MAWP: 25,000 psi</p>	<p>MAWP: 10,000 psi</p>	<p>MAWP: 9,100 psi</p>	<p>MAWP: 5,100 psi</p>	<p>MAWP: 5,100 psi</p>
				

Data Sheet

**E2X-E2F Explosion-Proof Pressure Transducer
For Hydrogen Applications**

TABLE 4 - ELECTRICAL CONNECTION DIMENSIONS

DIMENSIONS

For reference only, consult Ashcroft for specific dimensional drawings

**½ NPT Conduit
With Flying Leads**

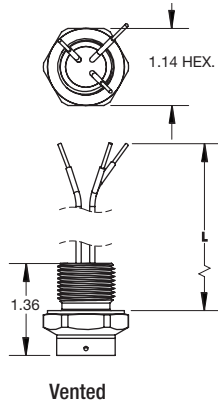
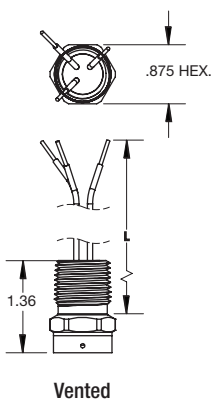
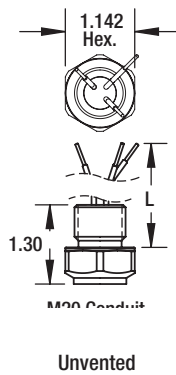
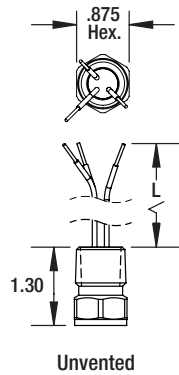
Code: CF
IP67 (NEMA 4X)

-40 °F to 176 °F (-40 °C to 80 °C)


**M20 Conduit
With Flying Leads**

Code: MF
IP67 (NEMA 4X)

-40 °F to 176 °F (-40 °C to 80 °C)




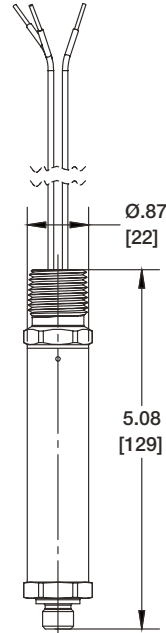Vented conduit supplied on units
with pressure range ≤ to 500#



LOOP SUPPLY VOLTAGE CHART

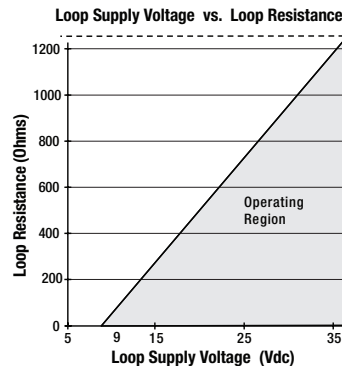FOR TRANSMITTERS WITH 4-20 mA OUTPUT SIGNAL,
THE MINIMUM VOLTAGE AT THE TERMINAL IS 9VDC



$V_{MIN} = 9V + (0.022 \cdot A \times R_{LOOP})$ (*includes a 10% safety factor)
 $R_{LOOP} = R_{SENSE} + R_{WIRING}$
 $R_{LOOP} = \text{Loop Resistance (Ohms)}$
 $R_{SENSE} = \text{Sense Resistance (Ohms)}$
 $R_{WIRING} = \text{Wire Resistance (Ohms)}$

NOTE: See power supply requirement chart
for maximum supply voltage limits